


9' Triangle Finishing Harrow Drag

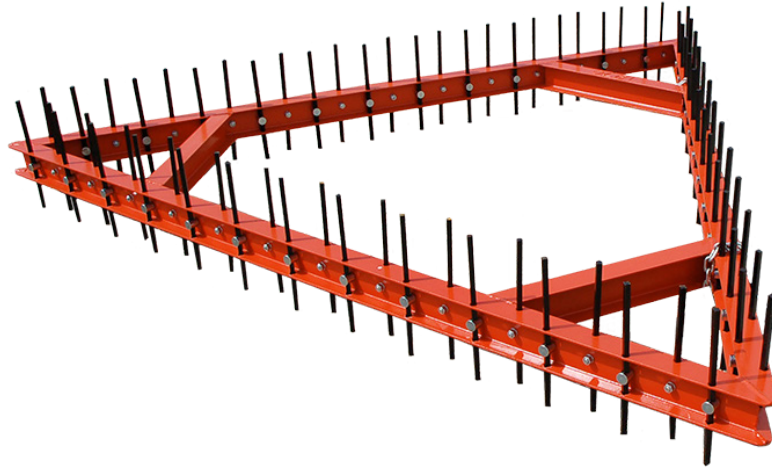

The Larcom and Mitchell 9' Triangle Drag Harrow is the most economical means to condition your soil surface. The double punched I-beams lock in the carbide tipped teeth which can be adjusted as the teeth wear. One of the original designs used back in 1952, Triangle Harrow is a low cost pull behind drag that continues to find a home on Standardbred tracks. All that is required is to hook the drag to the tractor drawbar and go! The 9ft I-Beam Frame has 75 teeth that cut into the racing surface.

TECHNICAL DATA

Triangle Drag:

- 9' - 75 Teeth 250 LBS 50-60 HP Tractor

Triangle Features:

- 8" Tungsten steel teeth with carbide tips.
- 4" Welded I-Beam construction for durable performance.
- Pulled by provided chains

ADDITIONAL OPTIONS

- Can be Double/Triple Ganged for wide coverage